


A302312

Type 2N5

Cable Construction		
Conductor (2)	20 AWG 19/.0071" Hard-tinned, Cadmium Copper	O.D. .034"
	Insulation	.031 EPR .095"
Cabling	2 Conductors Cabled	.190"
Jacket	.0765" Neoprene	.343"

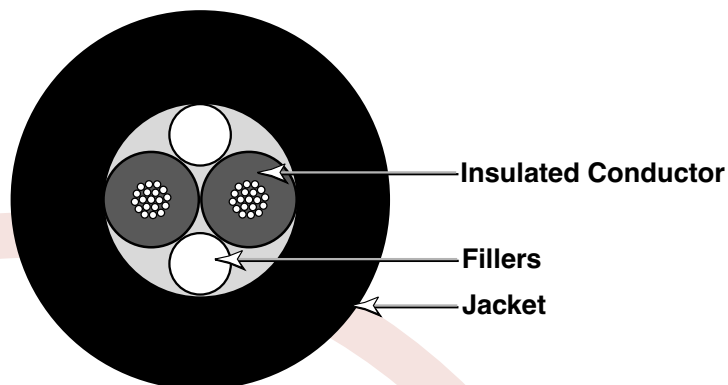

Cable Characteristics (Nominal Values)

Physical	
Weight in Air	69 lb/kft
Weight in Sea Water	28 lb/kft

Mechanical	
Minimum Bend Radius	3"

Electrical	
Voltage Rating	
Conductor	600 Volts
dc Resistance	
Conductor	14.3 Ω/kft
Insulation Resistance	
Conductor to Conductor	≥ 1,000 MΩ-kft

Capacitance @ 1 kHz	
Conductor to mate	30 pF/ft

