


VIDEO INSPECTION CABLE

A301359

ELEMENT A (Coax) 1 required		
Conductor	22 19/.0063" Bare Copper	.030"
Insulation	.0735" Wall LDPE	.177"
Served Return 26 AWG Bare Copper	Left Helix: 95% Coverage	.208"
	Tape Return: Copper Polyester	.213"

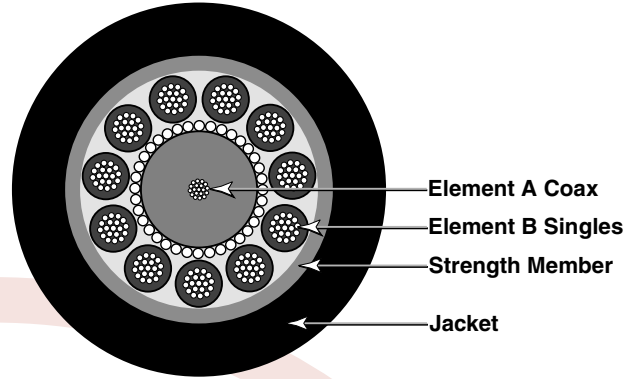

ELEMENT B (Singles) 11 Required		
Conductor	18 AWG 19/.0092 Bare Copper	.045"
Insulation	.012" Wall PP	.069"
Colors	1 White, 1 Red, 1 Black, 4 Orange, and 4 Green	

Cable Construction		
Cable Assembly	Twist 11-B around A	.351"
Strength Member	Braided Pu Coated Polyester	.398"
Jacket	.075" Wall Hytrel, Black	.548"

Cable Characteristics (Nominal Values @ 20°C)

Physical	
Weight in Air	181 lb/kft
Weight in Sea Water	76 lb/kft
Operating Temperature Range (metric)	-15°C to 80°C

Attenuation	
@ .5 MHz	2.2 dB/kft
@ 1 MHz	3.3 dB/kft
@ 5 MHz	6.8 dB/kft
@ 10 MHz	9.7 dB/kft
@ 12 MHz	10.6 dB/kft
@ 15 MHz	11.9 dB/kft

Mechanical	
Breaking Strength	2,000 lbf
Recommended Working Load	200 lbf
Recommended Minimum Bend Radius	6"

Capacitance @ 1 kHz	
Element A	21 pF/ft

Electrical	
Voltage Rating	
Element A, cond. to return	1,000 volts
Element B	600 volts
dc Resistance	
Element A, conductor	15.5 Ω/kft
Element A, return	1.5 Ω/kft
Element B	7.8 Ω/kft

Characteristic Impedance	
Element A @ 1 MHz	76 Ω

Insulation Resistance	
Element A	90,000 MΩ-kft
Element B	10,000 MΩ-kft



PITTSBURGH WIRE & CABLE INC.

www.pittsburghwire.com

Sales and Ordering: 1-800-458-1222